

FULL CIRCLE SINGLE BAND STAINLESS STEEL REPAIR CLAMP




Fundiciones y Accesorios


AYF Stainless Steel Repair Clamps provide a quick, efficient and versatile method of repairing broken or damaged rigid pipe material from 15mm to 600mm in diameter.

The Repair Clamps are designed to suit Ductile Iron, Cast Iron, Steel, uPVC, MOPVC, PE, Asbestos Cement, Copper, ABS and GRP pipes.

Suitable for all potable water and waste water applications up to 16 bar working pressure, and on all medium gas pressure distribution applications up to 4 bar (100 lb / sq inch) working pressure.

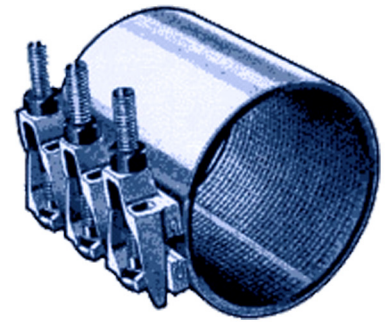

Technical Specification - Single Band Stainless Steel Repair Clamps

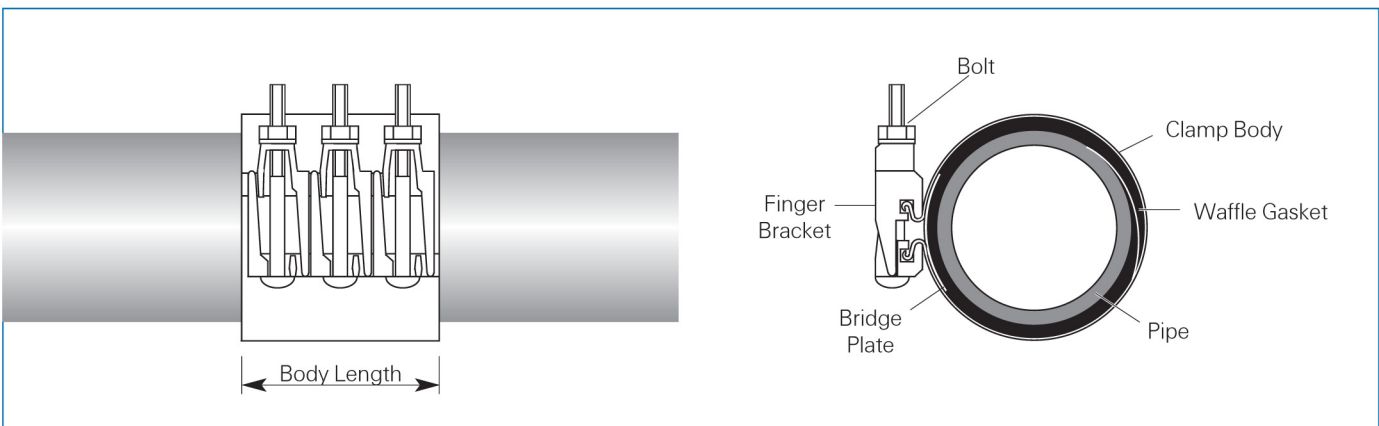

- **Clamp Body** : Stainless Steel AISI 304 / 316, according to BS1449

- **Finger Bracket** : Cast Iron according to BS 2789:1985 Epoxy coated or Stainless Steel AISI 304 / 316

- **Bolts, Nuts & Washers** : Carbon Steel Galvanized or Stainless Steel AISI 304 / 316

- **Sealing Gaskets** : Synthetic Rubber EPDM (ethylene-propylene) according to BS EN 681-1:1996 or NBR (nitrile-butadiene) according to BS 2494:1990

- **Inner Bridge Plate** : Stainless Steel AISI 304 / 316

Code	Size (mm)	Range (mm)	Body Length (mm)	Working Pressure
RC015/020-024	15 mm	20 - 24	100 - 200	16 bar
RC020/024-028	20 mm	24 - 28	100 - 200	16 bar
RC025/028-032	25 mm	28 - 32	100 - 200	16 bar
RC025/032-036	25 mm	32 - 36	100 - 200	16 bar
RC030/036-040	30 mm	36 - 40	100 - 200	16 bar
RC030/040-044	30 mm	40 - 44	100 - 200	16 bar
RC040/044-048	40 mm	44 - 48	100 - 200	16 bar
RC040/048-052	40 mm	48 - 52	100 - 200	16 bar
RC050/052-060	50 mm	52 - 60	200 - 300	16 bar
RC050/060-070	50 mm	60 - 70	200 - 300	16 bar
RC065/070-078	65 mm	70 - 78	200 - 300	16 bar
RC065/078-088	65 mm	78 - 88	200 - 300	16 bar
RC080/088-098	80 mm	88 - 98	200 - 300	16 bar
RC100/110-125	100 mm	110 - 125	200 - 400	16 bar
RC125/130-145	125 mm	130 - 145	200 - 400	16 bar
RC125/145-160	125 mm	145 - 160	200 - 400	16 bar
RC150/163-178	150 mm	163 - 178	300 - 400	16 bar
RC200/219-239	200 mm	219 - 239	300 - 400	16 bar
RC250/273-295	250 mm	273 - 295	300 - 400	16 bar
RC300/324-346	300 mm	324 - 346	300 - 400	16 bar
RC350/365-387	350 mm	365 - 387	300 - 400	10 bar
RC400/420-445	400 mm	420 - 445	300 - 400	10 bar
RC450/480-505	450 mm	480 - 505	300 - 400	10 bar
RC500/525-550	500 mm	525 - 550	300 - 400	6 bar
RC600/630-655	600 mm	630 - 655	300 - 400	6 bar

