


DISMANTLING JOINT



NO.	SPECIFICATION	MATERIAL	STANDRAD
1	LEFT FLANGE	DUCTILE IRON	BS2789
2	BOLT	CARBON STEEL	BS1769
3	BOLT	CARBON STEEL	BS1769
4	MID FLANGE	DUCTILE IRON	BS2789
5	BOLT	CARBON STEEL	BS1769
6	NUT	CARBON STEEL	BS1769
7	RIGHT FLANGE	DUCTILE IRON	BS2789
8	RING	NBR	BS2494

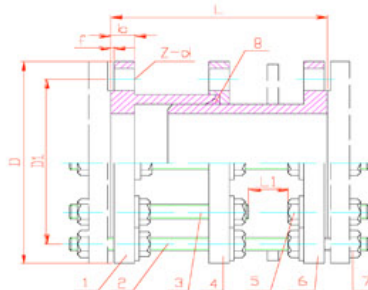

PN16	SIZE	D	D1	f	b	L	LL	Z-d	Studs
DN50	DN50	φ165	φ125	3	19	200	30	4-φ19	M16X325
DN65	DN65	φ185	φ145	3	19	200	30	4-φ19	M16X325
DN80	DN80	φ200	φ160	3	19	200	30	8-φ19	M16X325
DN100	DN100	φ220	φ180	3	19	210	30	8-φ19	M16X335
DN125	DN125	φ250	φ210	3	19	210	30	8-φ19	M16X335
DN150	DN150	φ285	φ240	3	19	210	30	8-φ23	M20X335
DN200	DN200	φ340	φ295	3	20	230	35	12-φ23	M20X350
DN250	DN250	φ400	φ355	3	22	230	35	12-φ28	M24X360
DN300	DN300	φ455	φ410	4	24.5	230	35	12-φ28	M24X360
DN400	DN400	φ580	φ525	4	28	270	40	16-φ31	M27X395
DN500	DN500	φ715	φ650	4	31.5	280	40	20-φ34	M30X425
DN600	DN600	φ840	φ770	5	35	300	40	20-φ37	M33X460
DN700	DN700	φ910	φ840	5	39.5	320	40	24-φ37	M33X490
DN800	DN800	φ1025	φ950	5	43	340	45	24-φ40	M36X535
DN900	DN900	φ1125	φ1050	5	46.5	340	45	28-φ40	M36X535
DN1000	DN1000	φ1255	φ1170	5	50	360	45	28-φ43	M39X570
DN1100	DN1100	φ1355	φ1270	5	53.5	360	45	32-φ43	M39X570
DN1200	DN1200	φ1485	φ1390	5	57	360	45	32-φ49	M45X580